


## Multi-Channel Digital Audio Monitor

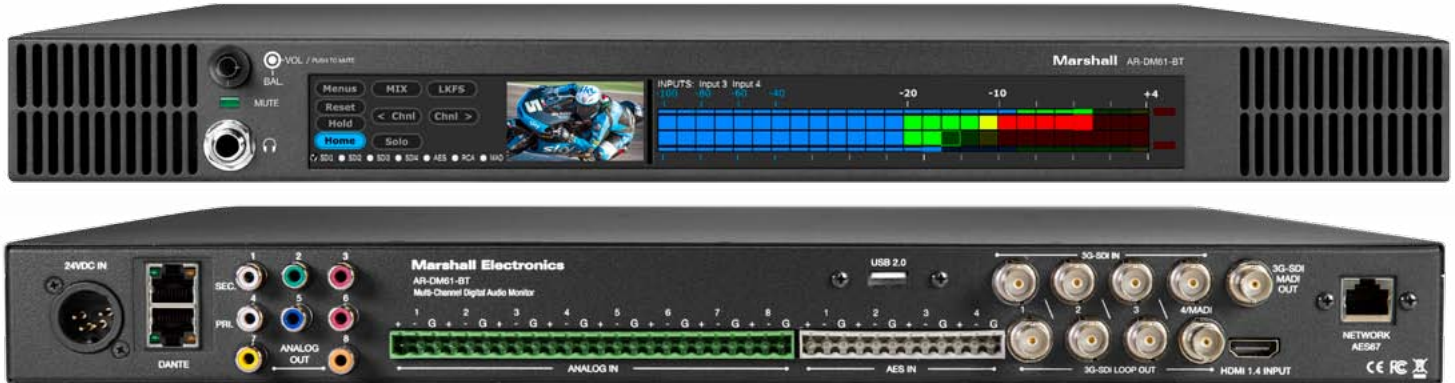

The **Marshall AR-DM61-BT Multi-Channel Digital Audio Monitor** packs versatile audio analysis functions, flexible matrix conversion tools and a pair of powerful speakers into 1 RU. The first audio rack unit with an intuitive 10" wide LCD touchscreen in the industry, the AR-DM61-BT can display up to 64 audio channels from multiple signal types with 3GSDI loop-through, and includes a built-in live video preview confidence monitor.

The AR-DM61-BT is an ideal audio/video QC solution for TV stations, broadcast trucks, transfer stations and house of worship facilities.

### PRODUCT FEATURES

- 10" LCD Intuitive Touchscreen Panel displays up to 64 channels vertical or 2 detailed channels horizontal with LKFS bars and peak indicators
- Built-in live video preview monitor
- Accepts inputs from multiple signal types with matrix conversion
- High-powered stereo speakers (up to 100 dB output)
- Push-to-mute functionality
- Slim 1 RU Design
- Support for all current Dolby™ formats including 7.1 Surround Sound
- Optional Dante™ Networked Audio module
- Store and retrieve saved presets via web server
- Software upgradeable "Future-proof" platform
- AES 67 Compliant

### INPUTS & OUTPUTS

- Four dedicated 3GSDI inputs with loop through (1 MADI compatible), and one additional HDMI input
- 8 balanced analog inputs on Phoenix connectors (-20 through +60 dBV gain)
- 4 stereo AES inputs on Phoenix connectors
- 8 channels RCA output (-10 dB or +4 dB switchable)
- Dolby™/Dante™ optional modules
- Ethernet (RJ45) with IP addressing
- Front-facing headphone jack (1/4")

